

# BVS-S

Product data Vertical Bucky Stand



Vertical Bucky Stand floor mounted or with the optional self-standing basement.  
 Complete with a Potter Bucky for cassettes up to 35x43 cm, manually adjustable on height and locked into position by mechanical brake.


The cassette loading can be done on the right or the left side. Optional possibility to install an automatic cassette loading Potter Bucky or a cassette sensing device Potter Bucky for use with an automatic collimation system.

All Potter Buckies accept detection chamber for automatic exposure controls.

**BVS-S TECHNICAL DATA**

<b>POTTER BUCKY POWER SUPPLY</b>	<ul style="list-style-type: none"> <li>• Single-phase 230 V ± 10%, 50/60 Hz</li> </ul>
<b>MAIN FEATURES</b>	<ul style="list-style-type: none"> <li>• Potter Bucky for all cassettes, size from 13x18 to 35x43 cm., with loading from both sides.</li> <li>• Mobile grid R= 10:1, 103 lines/mm, F= 150 cm.</li> <li>• Vertical displacement 130 cm.</li> </ul>
<b>OPTIONAL</b>	<ul style="list-style-type: none"> <li>• External cassette holder for cassette sizes up to 30x90 cm.</li> <li>• Detection chamber, for automatic exposure control</li> </ul>

BVS-S - 03/2005

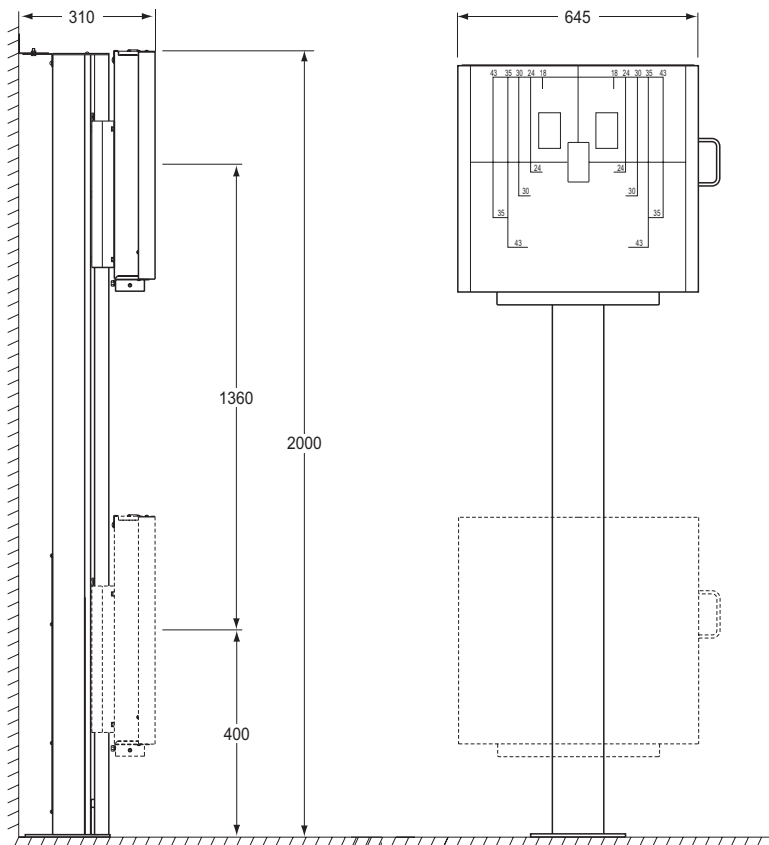

	Dimensions	Weights
<b>BVS-S</b>	1 box cm. 200x80x48(h)	kg. 250 G.W.



**ESSE 3** Via Garibaldi 30  
 14022 Castelnuovo D.B (AT)  
 tel +39 011 99 27 706  
 fax +39 011 99 27 506  
 e-mail [esse3@tuttopmi.it](mailto:esse3@tuttopmi.it)  
 web : [www.4ci.com](http://www.4ci.com)



Data subjected to alteration without prior notice.